BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Estimate Cost Rs. 2000000.00

Name of Work: Estimate for Providing and Fixing New Street Signage Boards in Ward No. 09, Vidyaranyapura Sub Division.

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	Providing and fixing ornamental name boards of size 2.10x0.50Mts and 2 Column of size 0.15x0.15 mts of hight 1.23 mts aof each board masde of C.C 1:1, 5:3 with necessary centreing and fromwork, smooth finishing with reinforcement etc including fabrication charges painting letters [BANGALORE MAHANAGARA PALIKE] earthwork excavation concreting and transportation charges from manufacturing yard to the site of work etc complete with all lead nad lift laoding ans unloading and executing as per the direction of the Engineer-in-charge (HR 06-07 (P.43/I.3)	Each							
			1	2			**2**	6200.00	**12400.00**
	Basic Rate	6200.00							
2	Retro - Reflectorised Traffic Signs :- Providing and fixing of retro - reflectorised cautionary, mandatory and informatory sign as per IRC : 67 - 2001 made of high intensity grade micro prismatic HIP type IV sheeting, fixed over alumium sheeting, 2mm thick firmly fixed to the ground by means of properly designed foundation with M15 grade cement concrete 45cms x 45cm x 60cm, 60 cm below ground level as per approved drawing. The item includes earthwork excavation, Cement Concrete M-15 grade, 2 coats of approved colour synthetic enamel painting to the steel surface, as per clauses, including curing, cost of all materials, labour, loading, unloading, lead, lift, transporting etc., complete. (P.No.65, I.No.8.04 of NH SR 2009-10) Supported on a class B GI pipe 80mm outer dia, 3.50mtr long	Each							
	60cm x 60cm square		1	343			**343.00**	4957.20	**1700320.00**
	Basic Rate	4590.00							
	Area Weightage @ 8%	367.20							
	Total	**4957.20**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
3	KSRB 2-2.2 : Earthwork excavation for foundation of buildings, water supply, sanitary lines and electrical conduits either in pits or in trenches 1.5m and above in width, in Ordinary soil not exceeding 1.5m. In depth with lead upto 50m. after breaking of clods complete as per specifications. Specification. **No. KBS 2.1(b) / 2.3.5 PWD SR 2013-14 (P.5 / 2.4)**	Cum							
	Sign Boards		2	0.60	0.60	0.80	0.58		
							0.58	227.88	**131.00**
	Basic Rate	211.00							
	Area Weightage @ 8%	16.88							
	Total	**227.88**							
4	KSRB 100-1 Loading and unloading ofstone **aggregates / sand/ kanker/ Moorum /soil** KSRRB M100-1 Placing tipper at loading with front end loader dumpting turning for return trip excluding time for haulged and return trip complete as per specification item No 17.1 page 117 and KSRB M.100.4.1 costof haulage excluding loading and unloading MORTH to a distance of 4.00 K.M **(Item No 17.4 Page 117 (SR 2013-14)**	cum							
				Vide Item No. 3			**0.58**	72.71	**42.00**
	Average weight of earth 1.28 tonne / kg for 2X1.28X2.00=5.12	5.12							
	Add loading and unloading Vide item no.17.1 P.no.144	62.20							
		67.32							
	Area Weightage @ 8%	5.39							
	Total	**72.71**							
5	KSRB- 4-1.5 : Providing and laying in position plain cement concrete of **mix M20 with OPC cement @ 300 kgs, with 20mm** and down size graded granite metal coarse aggregates @ 0.64 cum and fine aggregares @ 0.43 cum with superplastisiser @ 3lts confirming to IS9103-1999 reaffirmed-2008, machine mixed, concrete laid in layers not exceeding 15cms, thick, well compacted, in foundation, plinth and cills, including cost of all materials, labour, HOM of machinery, curing complete as per specifications, specification. No. KBS 4.1,4.2, **No. 12/ Item No. 4.5/ PWD SR 2013-14**	Cum							
	Sign Boards		2	0.45	0.45	0.50	0.20		
							0.20	5323.32	**1078.00**
	Basic Rate	4929.00							
	Area Weightage @ 8%	394.32							
	Total	**5323.32**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
6	KSRRB M800-11.1: Painting lines, dashes, arrows etc, on roads in two coats on new work :- painting lines, dashes, arrows etc on roads in two coats on new work with ready mixed road marking paint conforming to IS:164 on bituminous surface, including cleaning the surface of all dirt, dust and other foreign matter, demarcation at the and traffic control complete as per specification, i) over 10 cm in width, MORTH specification No. 803, **No. 197 / Item No. 24.11/ PWD SR 2013-14**	Sqm	270						
	Sign Boards		~~290~~	1.35		0.60	~~234.90~~	218.70	
			~~300~~	~~0.60~~		0.60	~~108.00~~	123.48	
			342				**342.90**	108.00	**37033.00**
	Basic Rate	100.00							
	Area Weightage @ 8%	8.00							
	Total	**108.00**							
7	KSRRB M800-9: Painting new letter and figures of any shade with synthetic enamel paint block or any other approved colour to give an even shade complete as per specification, ("ii) Hindi (Matras commas and the like not to be measured and paid for half letter shall be counted as half) MORTH specification No. 803, **No. 197 / Item No. 24.9 / PWD SR 2013-14**	Cm							
			1	50000			50000		
							50000	0.65	**32400.00**
	Basic Rate	0.60							
	Area Weightage @ 8%	0.05							
	Total	**0.65**							
8	Sub Total								**1783252.00**
9	KRIDL Charges @ 11%								**196158.00**
10	QC Charges @ 1%								**17833.00**
11	Miscellaneous charges								**2757.00**
								Total	**2000000.00**

(Rupees Twenty Lakhs Only)

Technical Sanction for Rs. Twenty Lakhs only
EE/BTP/350/13-14, 03/03/14

ADMINISTRATIVELY SANCTIONED FOR Rs. 20.00 lakhs
Rupees Twenty lakhs Only

Under P-0190

Add Gpl (G2) AS/933/13-14 dated 28/2/2014 Rs. 20.00 lakhs

Addl Commissioner
(Yelahanka Zone)
BBMP, Bengaluru-92

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per P.W.D S.R of 2013-14.
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Vidyaranyapura Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE, BYATARAYANAPURA DIVISION

Lead Statement for Srinivaspura Dumping Yard for Ward No. 09, Vidyaranyapura Sub Division.

Lead Distance

1.	From BBMP Sub Division office to Devi Circle	1.50 Kms
2.	From Devi Circle to Thirumala Daba	2.00 Kms
3.	From Thirumala Daba to 3rd Cross SBI Bank	2.00 Kms
4.	From 3rd Cross SBI Bank to Sheshadripuram College	0.50 Kms
5.	From Shesadripuram College to Police Station	0.80 Kms
6.	From Police Station to Kogilu Cross	0.60 Kms
7.	From Kogilu Cross to Srinivasapura	4.00 Kms
8.	From Srinivasapura to Dumping Yard	0.50 Kms
	Total	**11.90 Kms**

Certificate:

1. Certified that the Srinivasapura Dumping Yard us the approved dumping yard for ward no. 09 BBMP
2. BBMP Sub Division office Vidyaranyapura is taken as the centre place for calculating the lead distance for ward no. 09.
3. The above distance is the shortest distance for calculating the lead.

Assistant Engineer Ward No. 09	Assistant Executive Engineer Vidyaranyapura Sub Division	Executive Engineer Byatarayanapura Division

LEAD CHART FOR DUMPING YARD FOR WARD NO 09

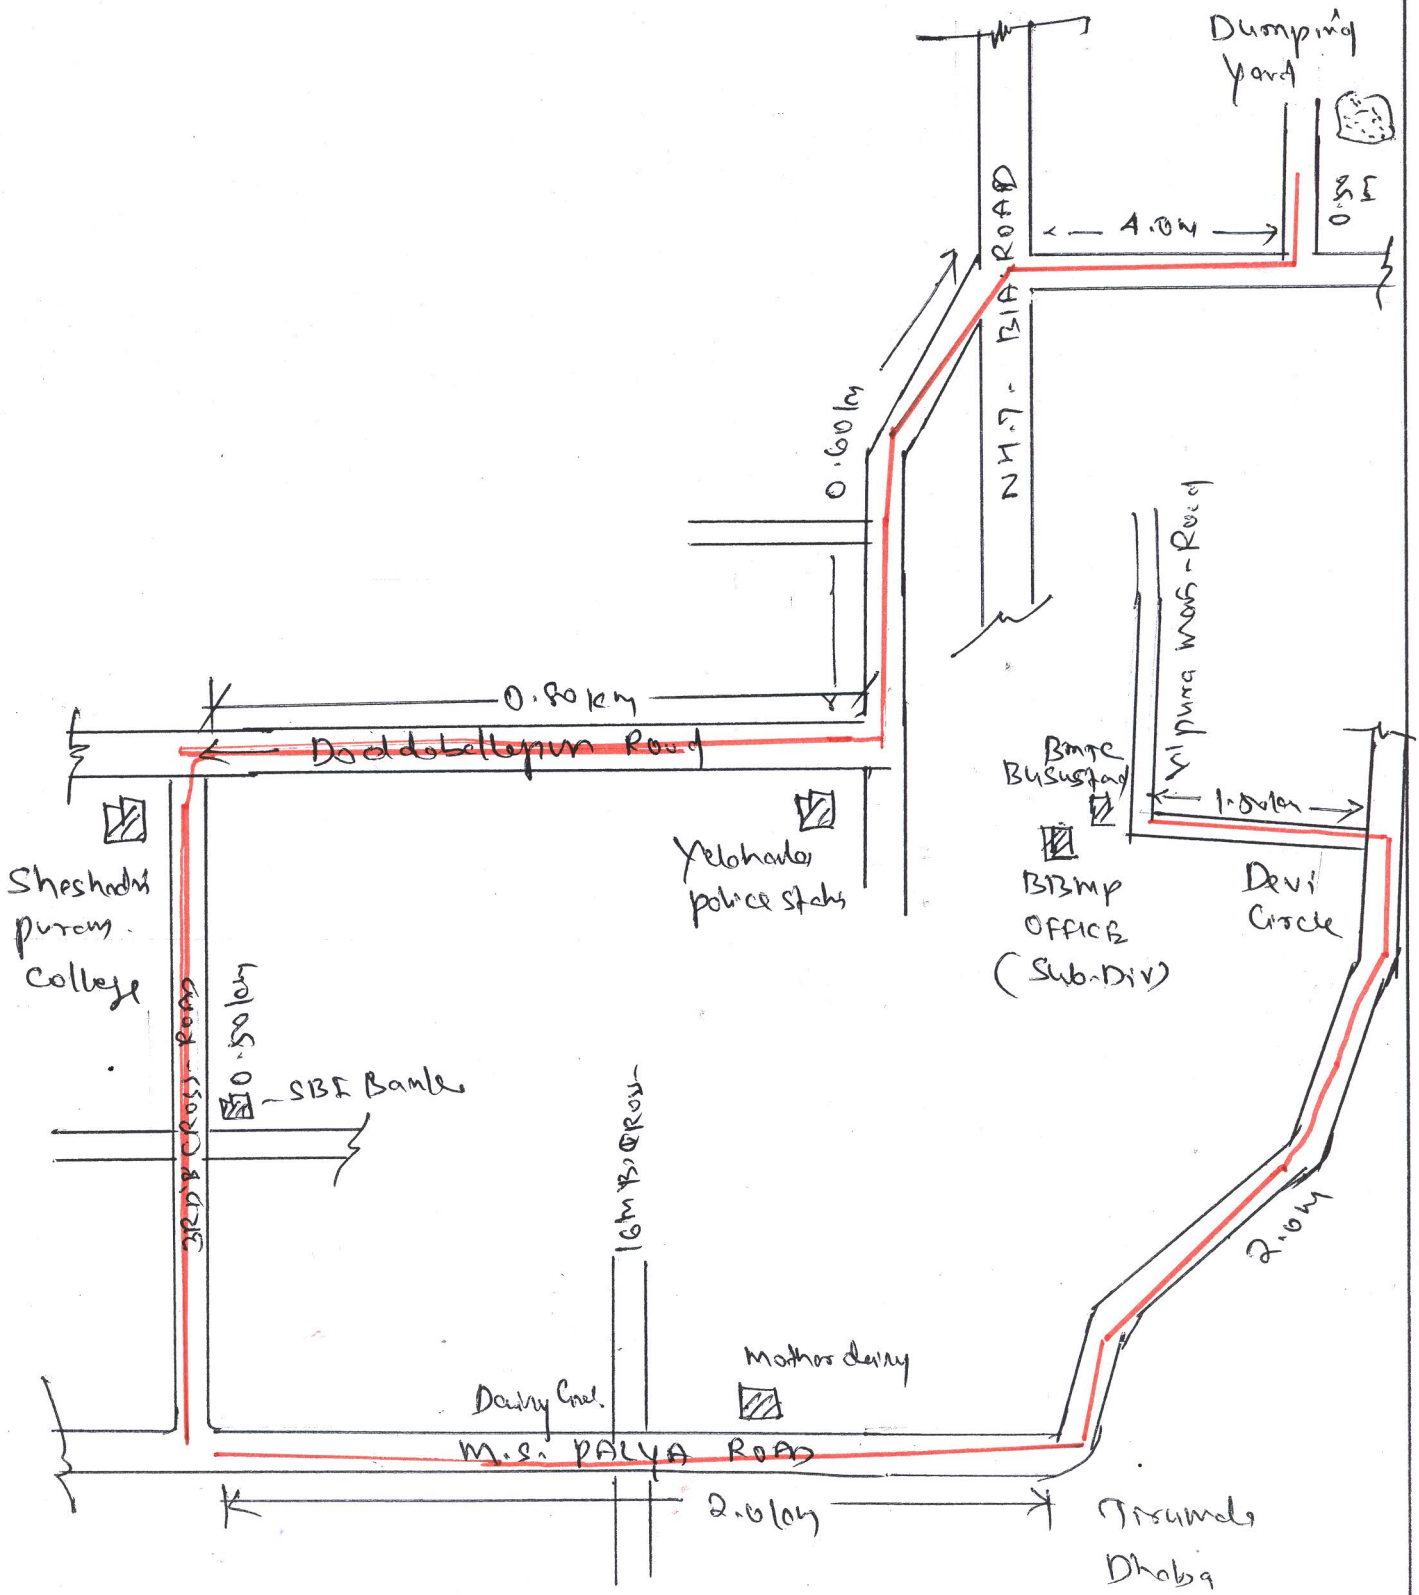

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ
ಯಲಹಂಕ ವಲಯ,
ಬೃ. ಬೆಂ. ಮ. ಸಾ., ಬೆಂಗಳೂರು-97